

MAINLAND FASTENERS


Rivnuts Aluminium Low Profile Technical Data

IN79 Series

Aluminium | Low Profile | Splined | Open End

Low profile head. Optimal for low load bearing applications in thin sheet. Dimensioned for installation into hard metric holes. Splined body improves torque-to-turn resistance.

Material: Aluminium

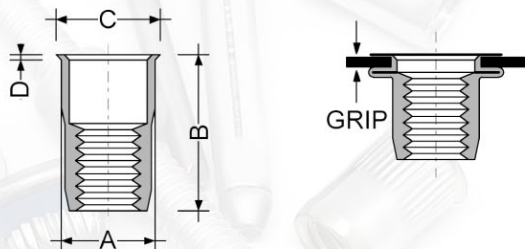

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M3	IN79-0315	0.80 - 1.50	5.00	4.95	9.00	6.00	0.50	3.00	0.60	1.20
	IN79-0425	0.80 - 2.50	6.00	5.95	11.0	7.00	0.50	3.70	0.70	3.60
M4	IN79-0435	2.50 - 3.50	6.00	5.95	12.0	7.00	0.50	3.70	0.70	3.60
	IN79-0525	0.80 - 2.50	7.00	6.95	12.0	8.00	0.50	5.40	0.80	5.30
M5	IN79-0535	2.50 - 3.50	7.00	6.95	13.0	8.00	0.50	5.40	0.80	5.30
	IN79-0625	0.80 - 2.50	9.00	8.95	14.0	10.0	0.50	8.50	0.90	10.8
M6	IN79-0640	2.50 - 4.00	9.00	8.95	15.5	10.0	0.50	8.50	0.90	10.8
	IN79-0825	1.00 - 2.50	11.0	10.95	15.5	12.0	0.70	12.3	1.00	23.0
M8	IN79-0840	2.50 - 4.00	11.0	10.95	17.0	12.0	0.70	12.3	1.00	23.0
	IN79-1025	1.00 - 2.50	13.0	12.95	16.0	14.0	0.70	15.7	1.10	28.0
M10	IN79-1040	2.50 - 4.00	13.0	12.95	17.5	14.0	0.70	15.7	1.10	28.0