

MAINLAND FASTENERS

Rivnuts Stainless Steel Large Flange Technical Data


IN9408S Series

Stainless Steel | Large Flange | Splined | Open End

Optimal for high push-out applications. Dimensioned for installation into hard metric holes. Tapered entry. Splined body improves torque-to-turn resistance.

Material: 304 Stainless Steel

Also available in Stainless Steel 316 / A4 †

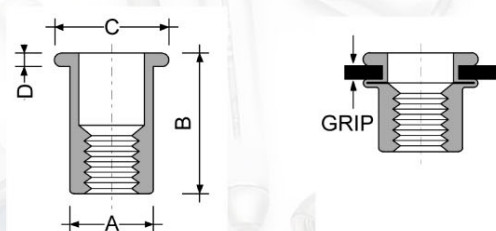

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M3	IN9408S-0320	0.30 - 2.00	5.00	4.95	9.80	8.00	0.80	5.30	3.30	3.00
M4	IN9408S-0425 †	0.30 - 2.50	6.00	5.95	12.0	9.00	1.00	9.80	4.90	4.90
	IN9408S-0440	2.50 - 4.00	6.00	5.95	13.5	9.00	1.00	9.80	4.90	4.90
M5	IN9408S-0530 †	0.30 - 3.00	7.00	6.95	13.0	10.0	1.00	15.7	6.90	9.80
	IN9408S-0545	3.00 - 4.50	7.00	6.95	14.5	10.0	1.00	15.7	6.90	9.80
M6	IN9408S-0630 †	0.50 - 3.00	9.00	8.95	15.5	12.0	1.50	20.6	9.80	15.5
	IN9408S-0650	3.00 - 5.00	9.00	8.95	17.5	12.0	1.50	20.6	9.80	15.5
M8	IN9408S-0830 †	0.50 - 3.00	11.0	10.95	17.5	15.0	1.50	29.4	12.7	29.5
	IN9408S-0855	3.00 - 5.50	11.0	10.95	20.0	15.0	1.50	29.4	12.7	29.5
M10	IN9408S-1035 †	1.00 - 3.50	13.0	12.95	21.0	17.0	2.00	42.2	15.7	35.0
	IN9408S-1060	3.50 - 6.00	13.0	12.95	23.5	17.0	2.00	42.2	15.7	35.0
M12	IN9408S-1240	1.00 - 4.00	16.0	15.9	25.2	22.0	2.00	60.8	19.6	-