

MAINLAND FASTENERS

Rivnuts Stainless Steel Low Profile Technical Data


IN39006S Series

Stainless Steel | Low Profile | Splined | Open End

Low profile head. Optimal for low load bearing applications in thin sheet. Dimensioned for installation into hard metric holes. Splined body improves torque-to-turn resistance.

Material: 304 Stainless Steel

*Also available in Stainless Steel 316 / A4 †
Non splined body **

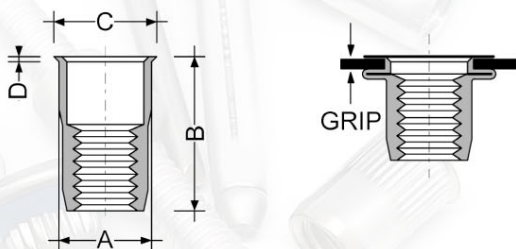

Thread Size	Part Code	Grip Range mm	Hole Size mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M3	IN39006S-0320	0.50 - 2.00	5.00	4.95	9.00	6.00	0.50	4.90	2.00	3.00
M4	IN39006S-0425NS*	0.50 - 2.50	6.00	5.95	11.0	7.00	0.50	9.80	2.90	4.90
	IN39006S-0440	2.50 - 4.00	6.00	5.95	12.5	7.00	0.50	9.80	2.90	4.90
M5	IN39006S-0530 †	0.50 - 3.00	7.00	6.95	12.0	8.00	0.50	15.7	2.90	9.80
	IN39006S-0545	3.00 - 4.50	7.00	6.95	13.5	8.00	0.50	15.7	2.90	9.80
M6	IN39006S-0630 †	0.50 - 3.00	9.00	8.95	14.0	10.0	0.50	20.6	3.00	15.5
	IN39006S-0650	3.00 - 5.00	9.00	8.95	16.0	10.0	0.50	22.6	3.00	15.5
M8	IN39006S-0830 †	0.50 - 3.00	11.0	10.95	16.0	12.0	0.50	29.4	4.00	29.5
	IN39006S-0855	3.00 - 5.50	11.0	10.95	18.5	12.0	0.50	29.4	4.00	29.5
M10	IN39006S-1035 †	1.00 - 3.50	13.0	12.95	19.0	14.2	0.80	42.2	6.00	35.0
	IN39006S-1060	3.50 - 6.00	13.0	12.95	21.5	14.2	0.80	42.2	6.00	35.0
M12	IN39006S-1242*	1.00 - 4.20	16.0	15.95	22.5	17.4	0.70	–	–	–