

MAINLAND FASTENERS


Rivnuts Steel Closed End Low Profile Technical Data

IN38 Series

Steel | Low Profile | Splined | Closed End

Low profile head. Optimal for low load bearing applications in thin sheet. Dimensioned for installation into hard metric holes. Splined body improves torque-to-turn resistance. For applications where sealing to prevent the ingress of solids or moisture is desirable.

Material: Steel
Finish: Zinc Plated

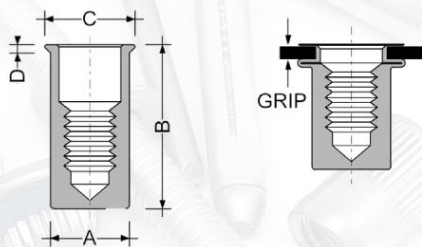

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M4	IN38-M4	0.50 - 2.50	6.00	5.95	15.0	6.80	0.50	5.40	1.50	5.10
M5	IN38-M5	0.50 - 2.50	7.00	6.95	18.0	7.90	0.50	6.40	2.00	7.80
M6	IN38-M6	0.50 - 3.00	9.00	8.95	21.5	10.0	0.50	12.7	2.50	12.4
M8	IN38-M8	1.00 - 3.20	11.0	10.95	22.5	12.0	0.50	13.7	2.90	16.4
M10	IN39101-0855HH	3.00 - 5.50	11.0	10.9	19.0	12.0	0.50	15.0	4.00	31.4
M10	IN39101-1045HH	1.00 - 4.50	13.0	12.9	20.0	14.5	1.00	19.7	5.20	45.0
	IN39101-1060	3.00 - 6.00	13.0	12.9	25.0	14.5	1.00	19.7	5.20	45.0
M12	IN39101-1240	1.00 - 4.00	16.0	15.9	25.0	18.0	1.00	-	-	-
	IN39101-1265	3.50 - 6.50	16.0	15.9	28.0	18.0	1.00	-	-	-