

MAINLAND FASTENERS

Rivnuts Steel Large Flange Technical Data


IN9408 Series

Steel | Large Flange | Splined | Open End

Optimal for high push-out applications. Dimensioned for installation into hard metric holes.
Tapered entry. Splined body improves torque-to-turn resistance.

Material: Steel
Finish: Zinc Plated

Non Splined Body*

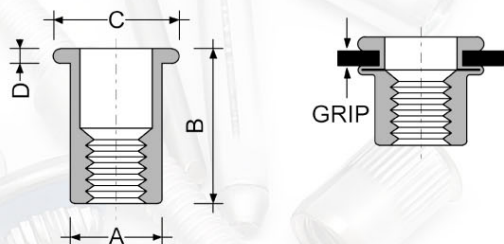

Thread Size	Part Code	Grip mm	Hole mm	A mm	B mm	C mm	D mm	Pull-Out KN	Push-Out KN	Maximum Torque Nm
M3	IN9408-0320	0.50 - 2.00	5.00	4.95	10.5	8.00	0.70	3.00	1.80	1.50
	IN9408-0425	0.50 - 2.50	6.00	5.95	11.0	9.00	0.80	3.60	2.90	5.10
M4	IN9408-0440	2.50 - 4.00	6.00	5.95	12.5	9.00	0.80	3.60	2.90	5.10
	IN9408-0530	0.70 - 3.00	7.00	6.95	13.0	10.0	1.00	7.80	4.20	7.90
M5	IN9408-0545	2.50 - 4.50	7.00	6.95	14.5	10.0	1.00	7.80	4.20	7.90
	IN9408-0630	0.50 - 3.00	9.00	8.95	16.5	13.0	1.50	10.8	6.50	12.4
M6	IN9408-0650	3.00 - 5.00	9.00	8.95	18.5	13.0	1.50	10.8	6.50	12.4
	IN9408-0830	1.00 - 3.00	11.0	10.95	17.5	16.0	1.50	12.5	7.90	32.0
M8	IN9408-0855	3.00 - 5.50	11.0	10.95	21.0	16.0	1.50	12.5	7.90	32.0
	IN9408-1040	1.00 - 4.00	13.0	12.95	24.0	19.0	2.00	17.3	10.7	45.0
M10	IN9408-1060	4.50 - 6.00	13.0	12.95	25.5	19.0	2.00	17.3	10.7	45.0
	IN9408-1240	1.00 - 4.00	16.0	15.95	25.2	21.7	2.00	30.4	10.7	68.6
M12	IN9408-1270*	4.00 - 7.00	16.0	15.95	30.0	21.7	2.00	30.4	10.7	68.6
	IN9408-1650*	1.00 - 5.00	21.0	20.95	32.8	26.0	2.50	–	–	–
M16										