


MAINLAND FASTENERS

Rivnuts Steel Hexagon Low Profile Technical Data

Steel Hexagon Low Profile Rivet-Nuts

Low profile head, used in conjunction with a metric hexagon hole to give maximum resistance to applied torque or unscrewing torque.

Material: Steel
Finish: Zinc Plated

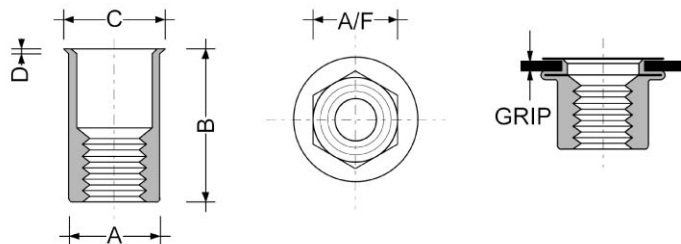

Thread Size	Part Code	Grip Range mm	Hole Size (Hex A/F) mm	A mm	B mm	C mm	D mm	Pull-Out (min) KN	Push-Out (min) KN	Maximum Torque Nm
M4	IN39101-0425HH	0.50 - 2.50	6.00	5.90	10.0	7.00	0.50	6.30	1.40	5.10
	IN39101-0440	2.50 - 4.00	6.00	5.90	12.2	7.00	0.50	6.30	1.40	5.10
M5	IN39101-0530HH	0.50 - 3.00	7.00	6.90	12.0	8.00	0.60	8.00	2.50	7.80
	IN39101-0545	3.00 - 4.50	7.00	6.90	14.7	8.00	0.60	8.00	2.50	7.80
M6	IN39101-0630HH	0.60 - 3.00	9.00	8.90	15.0	10.0	0.60	14.0	3.00	12.3
	IN39101-0655HH	3.00 - 5.50	9.00	8.90	18.0	10.0	0.60	14.0	3.00	12.3
M8	IN39101-0830HH	0.70 - 3.00	11.0	10.9	17.5	12.0	0.50	15.0	4.00	31.4
	IN39101-0855HH	3.00 - 5.50	11.0	10.9	19.0	12.0	0.50	15.0	4.00	31.4
M10	IN39101-1045HH	1.00 - 4.50	13.0	12.9	20.0	14.5	1.00	19.7	5.20	45.0
	IN39101-1060	3.00 - 6.00	13.0	12.9	25.0	14.5	1.00	19.7	5.20	45.0
M12	IN39101-1240	1.00 - 4.00	16.0	15.9	25.0	18.0	1.00	-	-	-
	IN39101-1265	3.50 - 6.50	16.0	15.9	28.0	18.0	1.00	-	-	-