

MAINLAND FASTENERS


Rivnuts Steel Low Profile Technical Data

Steel Low Profile Rivet-Nuts

Low profile head. Optimal for low load bearing applications in thin sheet. Dimensioned for installation into hard metric holes. Splined body improves torque-to-turn resistance.

Material: Steel

Finish: Zinc Plated

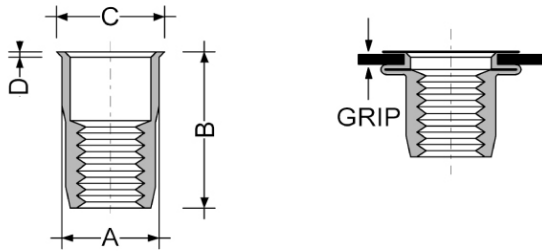

Thread Size	Part Code	Grip Range mm	Hole Size mm	A mm	B mm	C mm	D mm	Pull-Out (min) KN	Push-Out (min) KN	Maximum Torque Nm
M3	IN39006-0315	0.50 - 1.50	5.00	4.95	9.00	5.70	0.40	2.90	0.80	2.00
M4	IN39006-0425	0.50 - 2.50	6.00	5.95	11.2	6.50	0.45	3.60	1.20	5.10
	IN39006-0440	2.50 - 4.00	6.00	5.95	12.0	6.50	0.45	3.60	1.20	5.10
M5	IN39006-0530	0.50 - 3.00	7.00	6.95	12.0	7.60	0.50	7.80	1.40	7.90
	IN39006-0540	2.50 - 4.00	7.00	6.95	14.0	7.60	0.50	7.80	1.40	7.90
M6	IN39006-0630	0.50 - 3.00	9.00	8.95	15.0	10.0	0.50	10.8	2.50	12.4
	IN39006-0650	3.00 - 5.00	9.00	8.95	17.0	10.0	0.50	10.8	2.50	12.4
M8	IN39006-0830	0.50 - 3.00	11.0	10.95	17.3	12.0	0.50	12.5	3.50	32.0
	IN39006-0855	3.00 - 5.50	11.0	10.95	18.5	12.0	0.50	12.5	3.50	32.0
M10	IN39006-1040	1.00 - 4.00	13.0	12.95	20.5	14.0	0.60	17.3	3.90	45.0
	IN39006-1060	4.00 - 6.00	13.0	12.95	23.5	14.0	0.60	17.3	3.90	45.0
M12	IN39006-1240	1.00 - 4.00	16.0	15.90	24.0	17.1	0.60	32.4	3.90	-
	IN39006-1260	4.00 - 6.00	16.0	15.90	27.0	17.1	0.60	32.4	3.90	-